


# Specifications

Licence exempt radio version of the popular Loadlink with 100 metres range.  
 Push button control for tare & on/off  
 Radiolink is fitted with standard alkaline batteries and has no external antenna.  
 Calibrated in tonnes

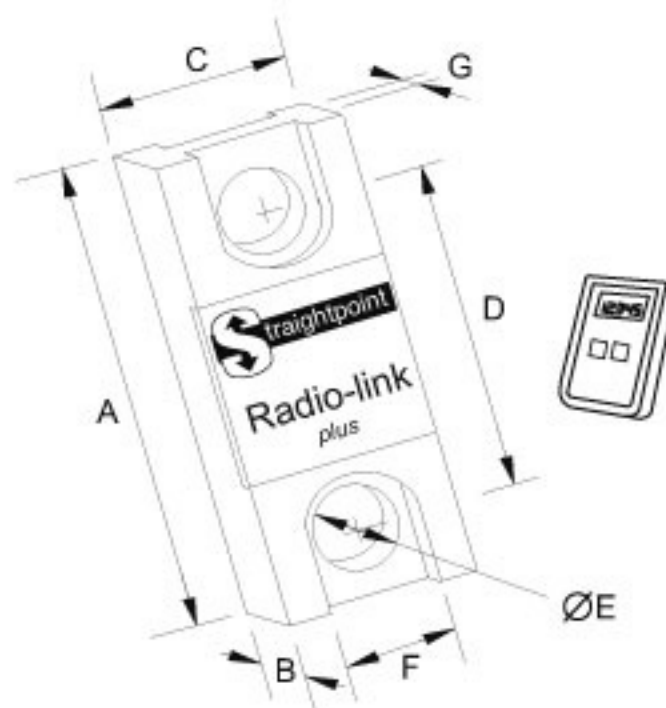

## Specifications

Part Number	RLP250KG	RLP500KG	RLP1T	RLP2T5	RLP5T	RLP12T	RLP25T	RLP50T	RLP100T	RLP200T	RLP250T
Capacity	250kg	500kg	1t	2.5t	5t	12t	25t	50t	100t	200t	250t
Resolution	0.05kg	0.1kg	0.0005t	0.001t	0.001t	0.002t	0.005t	0.01t	0.05t	0.1t	0.1t
Units	kg, N	kg, N	t, kN	t, kN	t, kN	t, kN	t, kN	t, kN	t, kN	t, kN	t, kN
Weight	1.5kg	1.5kg	1.5kg	1.5kg	2.2kg	3.5kg	5.2kg	10.9kg	37kg	80kg	80kg
Safety Factor	50:1	25:1	12:1	5:1	5:1	5:1	5:1	5:1	4:1	5:1	4:1
Battery Type	Handheld-2 x AA Alkaline / Loadcell 4 x AA alkaline										
Battery Life	Handheld-400hrs / Loadcell 850hrs continuous										
Display Type	7 digit 8.8mm LCD										
Operating Temp	-10 to 50c										
Accuracy	+/- 0.3% of applied load										
Frequency	2.4GHz										
Range	100 metres										
Data Rate	1 Update per second										
Protection	IP65										
Dimension A	204mm	204mm	204mm	204mm	249mm	305mm	340mm	424mm	608mm	690mm	690mm
Dimension B	43mm	43mm	43mm	43mm	43mm	47mm	60mm	75mm	99mm	150mm	150mm
Dimension C	101mm	101mm	101mm	101mm	101mm	101mm	110mm	163mm	255mm	305mm	305mm
Dimension D	146mm	146mm	146mm	146mm	165mm	193mm	215mm	230mm	320mm	350mm	350mm
Dimension E	24.5mm	24.5mm	24.5mm	24.5mm	38mm	47.5mm	55mm	76mm	108mm	125mm	125mm
Dimension F	47.5mm	47.5mm	47.5mm	47.5mm	68mm						
Dimension G	19mm	19mm	19mm	19mm	32mm						
Crosby Shackle	G210-3.25T	G210-3.25T	G210-3.25T	G210-3.25T	G210-6.5T	G210-12T	G210-25T	G2140-50T	G2140-110T	G2140-200T	G2140-250T